


## STANDARD WOOD FENCE DETAIL 6' & 8' HIGH WOODEN PRIVACY FENCE

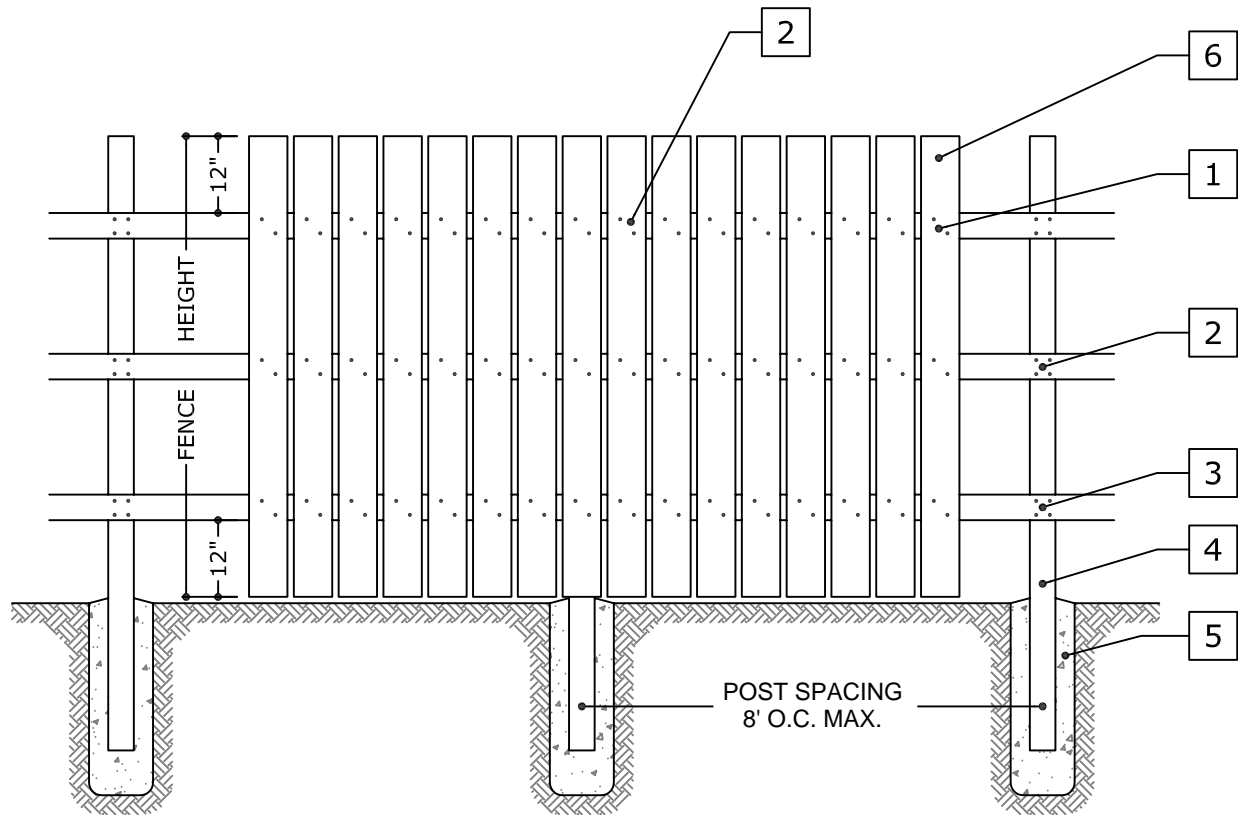

### **1. WOOD PICKETS**

MINIMUM 5/8" DRESSED THICKNESS. ATTACH EACH PICKET TO RAILS WITH TWO (2) 6d GALVANIZED NAILS OR TWO (2) #10 GALVANIZED SCREWS.

### **2. NAILS AND CONNECTORS**

ALL CONNECTORS (NAILS AND SCREWS) SHALL BE GALVANIZED.

### **3. WOOD RAILS**

MAXIMUM DISTANCE FROM TOP AND BOTTOM 12" (24" ELSEWHERE). MINIMUM RAIL SIZE 2"X4" WITH 3 RAILS REQUIRED, ATTACHED WITH A MINIMUM OF FOUR (4) 10d GALVANIZED NAILS TO WOOD POST.

### **4. WOOD POSTS**

NO. 2 GRADE OR BETTER, MINIMUM SIZE 4"X4", MINIMUM LENGTH = FENCE HEIGHT + 24", POST SPACING TO BE 8' ON CENTER MAXIMUM.

### **5. CONCRETE FOOTINGS**

AT EACH POST, MINIMUM DIAMETER OF 10" WITH A MINIMUM DEPTH OF 24" FROM FINISH GRADE. MINIMUM POST EMBEDMENT IS 24".

### **6. FINISH**

ANY FENCE LOCATED ADJACENT TO A PUBLIC RIGHT-OF-WAY OR PRIVATE ROAD SHALL BE PLACED WITH THE FINISHED SIDE FACING THAT RIGHT-OF-WAY.

#### **NOTE:**

PRE-ASSEMBLED WOOD PANEL FENCES ARE NOT COVERED BY THIS DETAIL. APPLICANT IS ADVISED TO OBTAIN MANUFACTURERS INSTALLATION INSTRUCTIONS FOR THESE PANELS AND THOSE INSTRUCTIONS MUST BE SUBMITTED WITH THE PERMIT APPLICATION.